



# USB Rover<sup>®</sup> 2850

## 2-port USB 1.1 85m\* Cat 5 Extender System

The USB 1.1 Rover 2850 extends USB 1.1 connections beyond the desktop up to 85\* meters.



LEX (Local Extender)



REX (Remote Extender)

### Features

The Rover 2850 uses technology ideal for extending USB peripherals including: keyboards, mice, interactive white boards, and game controllers and does not require external power adapters. Key features include:


- Remote extender supplies up to 400mA\*\* to USB devices
- Supports both full-speed (12 Mbps) and low-speed (1.5 Mbps) throughputs
- Robust ESD and EFT immunity for industrial environments
- 3-year warranty

Includes the ExtremeUSB<sup>®</sup> suite of features:

- True plug and play; no software drivers required
- Supports all major operating systems: Windows<sup>®</sup>, Mac OS X<sup>®</sup>, and Linux<sup>®</sup>
- Reliable operation with all USB 2.0 and 1.1 devices, including hubs
- Patented USB extension technology

### Applications

- Interactive white board
- Keyboard and mouse
- Sensor/data acquisition
- Industrial control

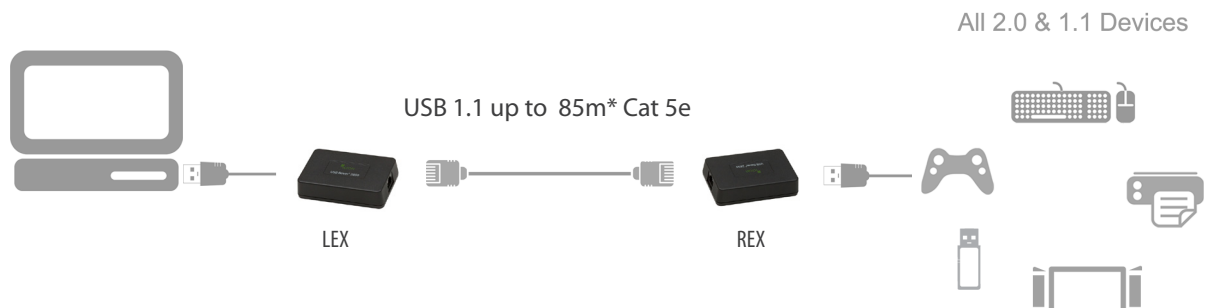

\* Up to 40m for all USB devices; 85m is achievable for most low powered HID USB devices.

\*\* 400mA when LEX is supplied with 800mA

www.icronshop.com  
sales@icronshop.com  
+44 1273 731 555



Specifications subject to change without notice.  
©2013  
Icron Technologies Corp.  
#90-00933-A04

# USB 1.1 Rover® 2850 Specifications



Specifications subject to  
change without notice.  
©2013  
Icron Technologies Corp.  
#90-00933-A04



## RANGE

Full-Speed and Low-Speed:	Up to 40m (131 ft)
Low-Speed:	Up to 85m (279 ft)*

## LEX (LOCAL EXTENDER)

USB Connector:	1 x USB Type B Receptacle
Link Connector:	1 x RJ45
Dimensions:	85mm x 55mm x 22mm (3.34" x 2.17" x 0.87")
Enclosure Material:	Black ABS

## REX (REMOTE EXTENDER)

USB Connector:	2 x USB Type A Receptacles
Link Connector:	1 x RJ45
Dimensions:	85mm x 55mm x 22mm (3.34" x 2.17" x 0.87")
Enclosure Material:	Black ABS
Maximum Current Available:	400mA shared between USB ports when LEX is supplied with 800mA

## ENVIRONMENTAL

Operating Temperature:	0°C to 50°C (32°F to 122°F)
------------------------	-----------------------------

## COMPLIANCE

Emissions:	FCC (Class B), CE (Class B)
Immunity:	CE Criteria A
Environmental:	RoHS2 (CE)
Safety:	CPSIA, Flammability V-1

## SUPPORT

Warranty:	3 years
-----------	---------

\* device and host dependant

## Ordering Information

The USB 1.1 Rover® 2850 system includes a LEX, REX, USB Cable, Quick Start Guide and three year warranty. For more information, email [sales@icronshop.com](mailto:sales@icronshop.com) or call +44 1273 731 555.

PART #	NAME	DESCRIPTION
00-00312	USB 1.1 Rover® 2850	2-Port 85m Cat 5e bus-powered USB Extender System